


GYRU-STAR 3-100SL

TECHNICAL SPECIFICATIONS



CARRIERS	SCREENING AREA	CAPACITY	WEIGHT	FLOW RATE
1.5 - 2 t Skid Steers	430 mm x 1000 mm	0.23 m ³	356 kg	65 l/min

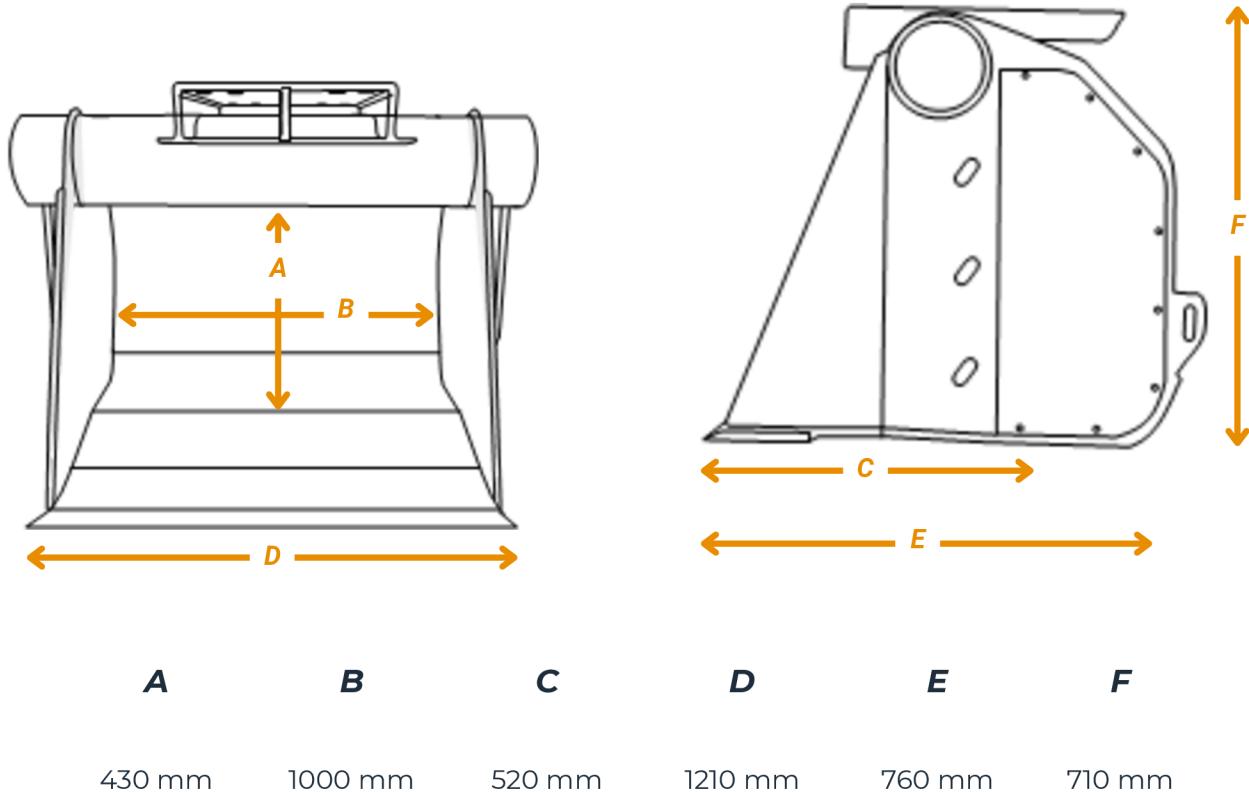

Please Note: The given weight is for a bucket fitted with a 20 mm fragment kit. The weight may vary depending on the fragment size selected. The compatible carrier weight range may change if the screening bucket is used in conjunction with a tiltrotator.